

REPLACE 2" COMBINED FIRE/DOMESTIC SERVICE (INCLUDES NEW 2" G.V.). RELOCATE METER TO RIGHT OF WAY AND RECONNECT TO EXISTING CUSTOMER SERVICE PLUMBING

REPLACE & RELOCATE METER TO RIGHT OF WAY AND RECONNECT TO EXISTING CUSTOMER SERVICE PLUMBING

2" STL MAIN TO REMAIN IN SERVICE UNTIL NEW MAIN IS ON LINE. ABANDON 2" STL MAIN AFTER ALL SERVICES HAVE BEEN TIED OVER TO THE NEW MAIN.

INSTALL 200 L.F. OF 6" PVC CL. 200 PIPELINE

INSTALL 2" PERMANENT BLOW-OFF ASSEMBLY PER SCWD STD. PLAN S-12.

RECONNECT EXISTING 2" COMBINED FIRE/DOMESTIC SERVICE (INCLUDES NEW 2" G.V.)

TIE-IN @ SAN ANDREAS ROAD & VERDOSO AVE.
 REMOVE:
 1-6" M.J. CAP
 INSTALL:
 1-6-INCH G.V., M.J.
 1-2" BRASS SADDLE
 1-2" BRASS BALL VALVE
 1-CHLORINATION TAP PER SCWD S-23.
 MISC. GALV. PIPE AND FITTINGS TO PROVIDE TEMPORARY SERVICE TO EXISTING 2" MAIN.
 1-ABANDONMENT OF 2" BRASS BALL VALVE AFTER NEW MAIN IS IN SERVICE AND ALL SERVICES TIED OVER.


NOTES:
 1. ALL PATCH PAVING ON VERDOSO AVE. SHALL BE REPLACED IN KIND OR WITH 2" AC TYPE B MEDIUM OVER 6" CLASS 2 BASEROCK AS A MINIMUM.
 2. NEW PAVEMENT SHALL BE FOG SEALED WITH SS-1 OIL AT THE RATE OF 0.05 GALLONS PER SQUARE YARD. THE EXTENTS OF THE FOG SEAL SHALL BE FROM OUTER MOST EDGES OF REPAVED AREA.
 3. VERDOSO AVE. IS NOT A COUNTY MAINTAINED ROAD.

No.	Revision/Issue	Date
A	ISSUED FOR REVIEW	6/17/05
0	ISSUED FOR CONSTRUCTION	6/21/05

LA SELVA BEACH PHASE I MAIN REPLACEMENTS
VERDOSO AVE.
 LA SELVA BEACH, SANTA CRUZ COUNTY, CALIFORNIA
 APN: N/A
 G:\01_Proj_Current\03-124\Draw\Rev_01D-5.dwg 6-24-05 09:23:59 AM corralc

SOQUEL CREEK WATER DISTRICT
 PO Box 156 Soquel, California 95073
 Phone Number: (831) 475-8500
 Fax Number: (831) 475-4281

CWO. NO. 03-124
 DATE: 6/17/05
 SCALE: 1"=20'
 DESIGN BY: TAD
 Dwg. No. D-03-2114-P

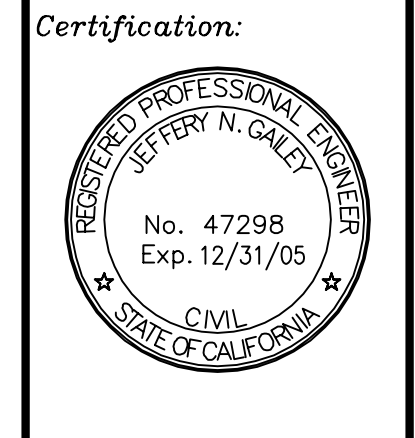

Jeffery N. Gailey
 Chief Engineer
 Engineering Manager

SHEET:
D-5