

CONTRACTOR TO CALL U.S.A. TO MARK LOCATIONS OF ALL UNDERGROUND UTILITIES PRIOR TO START OF CONSTRUCTION.


EXACT FIRE HYDRANT LOCATION TO BE DETERMINED IN THE FIELD BY DISTRICT INSPECTOR PRIOR TO CONSTRUCTION.

FIRE HYDRANT BURY FLANGE TO BE SET AT EXISTING EOP ELEVATION. ADD NECESSARY BREAK OFF SPOOL TO MATCH EXISTING GRADE.

- LIST OF MAJOR QUANTITIES:
- (1) 6" TAPPING SLEEVE
 - (1) 6" M.J. X FLG. GATE VALVE.
 - (1) CHRISTY G5 VALVE BOX AND LID
 - (4') 8" SDR 35 PVC PIPE
 - (1) 6" MJ HYDRANT BURY
 - (1) BREAK-OFF SPOOL (SIZE HEIGHT TO MATCH EXISTING GRADE)
 - (1) JONES J-3740 FIRE HYDRANT CONCRETE AS NEEDED FOR 3' X 3' PAD

PROJECT SCOPE:

HOT TAP AND INSTALL ONE JONES J-3740 STEAMER FIRE HYDRANT PER SOQUEL CREEK WATER DISTRICT STANDARD SPECIFICATIONS SECTION 307.05 & STD. PLANS S-9 & S-10. APPROXIMATE RUN: 3 FT.

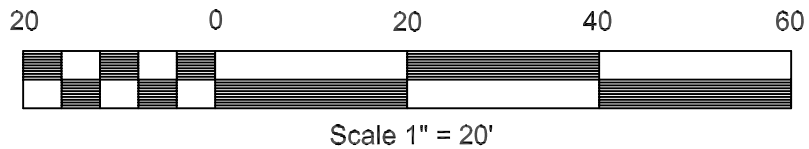

G:\01_Proj_Current\03-149\Draw\Rev_A\A-2.dwg 5-09-03 11:10:24 AM carolc